


XQY-PS2-1/26.5-KE

精密高频功分/合路器

precision RF power splitter/Combiner

参数/Parameters	规格/Specifications
频率范围 Frequency Range	1000~26500 MHz
插入损耗 Insertion Loss	≤ 1.5dB (Excluding theoretical loss 未含理论损耗 3.0dB)
输入驻波 Input Port VSWR	Typ.1.16 / Max.1.8
输出驻波 Output Port VSWR	Typ.1.12 / Max.1.5
隔离度 Isolation	Typ.22dB / Min.16dB
幅度平衡 Amplitude Balance	±0.4dB
相位平衡 Phase Balance	±5°
阻抗 Impedance	50 Ohms
端口接头 Input/Output Connectors	2.92mm-Female;
承受功率 Power Rating	Splitter 分路器用时 20W; Combiner 合路器用时 1W
工作温度 Operation Temperature	-45°C ~ +85°C
表面处理 Surface Finishing	Black paint 黑色烤漆
外形尺寸 Outline Dimensions	78*26*10 (mm)
重量 Weight	70 (g)

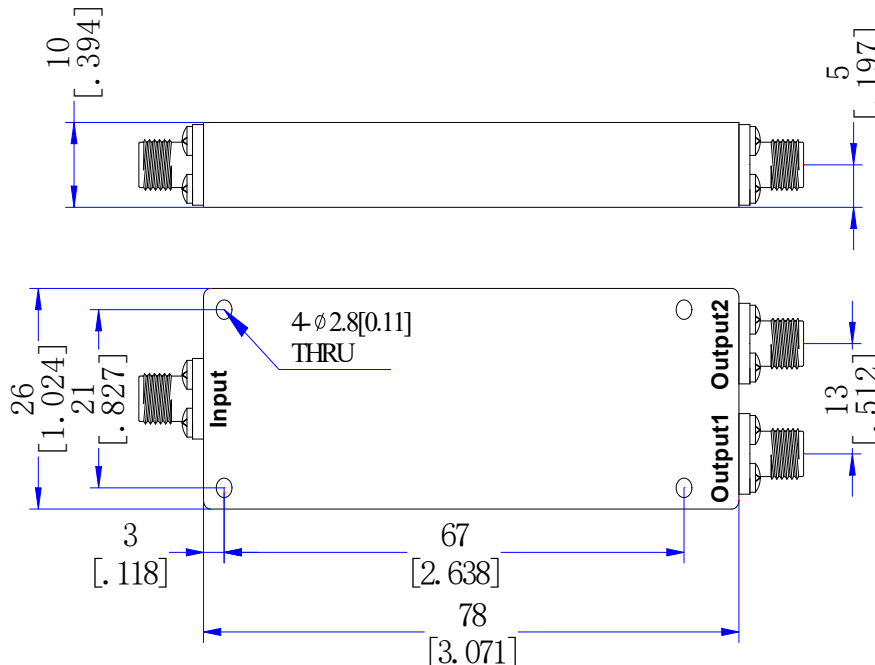

注: 尺寸(mm/[英寸]), 一般公差(± 0.3)